

Trouble Shooting



No visible bubbles	<ul style="list-style-type: none"> • Check power source • Remove plug and obstacles
Light blinks when operating unit	<ul style="list-style-type: none"> • Low battery indicator • Charge Unit ASAP
Low PPM levels when tested with H2 Blue Drops	<ul style="list-style-type: none"> • Allow 7 days to break-in • Keep Unit wet & charged • Use 6 ml water sample • Do Not Stir after each drop
Wetness in Generator	<ul style="list-style-type: none"> • Units are shipped wet
Battery not charging	<ul style="list-style-type: none"> • Check if Plug is defective
Unit is leaking water	<ul style="list-style-type: none"> • Check all seals, tighten lid • Empty waste chamber • Check if missing washers
Bottle has odor or Unit makes less gas	<ul style="list-style-type: none"> • Clean as needed • Check water source
Unit stopped working	<ul style="list-style-type: none"> • Call For Support
Glass bottle broke	<ul style="list-style-type: none"> • Call to order replacement
Unit stops charging	<ul style="list-style-type: none"> • Call to get a replacement
Water expels into waste chamber	<ul style="list-style-type: none"> • Relieve pressure at bottle lid or use a more purified water
For All Other or Any Unsolved Problem Call For Support	

H2WaterForLife LLC

Morris, Ct. USA

Tel: 860-806-9997

info@H2Waterforlife.com www.H2WaterForLife.com

H2WaterForLife.com



Global Leader in Hydrogen Water Makers

You're Going To Like
The Way You Feel!

H2 USB Sport MAXX



860-806-9997

Call US For Help or Visit Us On Line

www.H2WaterforLife.com



Advisories

- Never operate Generator without water in the bottle.
- Keep USB Port sealed by plugging its cover back in.
- Generator is shipped wet, remove plug before using.
- Operate only with any type of potable drinking water.
- Not for use with hot, carbonated or other beverages.
- Always keep Generator Well wet and never store dry.
- Unit will stop charging when LED light stops blinking.
- Do not place Generator unit in a refrigerator or cooler.
- Do not soak or submerge Generator Unit under water.
- Operate only for the water you will drink in minutes.
- Avoid exposing to sunshine heat that will dry unit.
- Use room temperature water. Never freeze or use ice.
- Never use any chemical cleaners on Generator unit.
- Release gas pressure at lid after every 2 cycle times.
- Keep away from children, Pets, Heat and Flames.
- Do not pull cable from wire or plug with wet hands.

Occasional Descaling Maintenance

Descale Generator plates by putting in bottle 1 part white vinegar or lemon juice diluted in 3 parts water and leave overnight, Rinse thoroughly with warm water before use.

Disclaimer: Product is not intended to diagnose, cure, treat or prevent disease. Seek medical advice if ill.

Most Advanced, Safe and Effective
Hydrogen Water Making Technology

Quick Start Guide



To Set Up:


1. Wash glass bottle and lid with soap and warm water.
2. Remove plug or obstacles from generator well or adapter.
3. Twist bottle on to generator/adapter and tighten to seal.
4. With bottle attached rinse out Generator with warm water.
5. Fill bottle up to below threads with clean drinking water.
6. Cap bottle with lid and insert USB cable into Unit USB Port.
7. Insert other cable end to power plug and plug it into outlet.
8. Charge Unit for at least 3 hours before starting to operate.

To Operate:

1. Pressing power button once starts a 5 minute cycle. (BLUE)
2. Use 5 minute cycle to refresh if you pause from drinking.
3. Pressing power button twice starts a 7 minute cycle. (GREEN)
4. We recommend doing two 7 minute cycles before drinking.
5. LED light and power shuts off at the end of each cycle time.
6. To shut Unit off manually press power button a third time.
7. Drink water out of bottle within minutes of cycle ending.
8. If you cycle more than twice, release gas pressure at top lid.
9. Stand unit on table when operating to open ozone gas release valve on bottom lid. Do Not drink or hold unit while operating.
10. For maximum benefit drink 4 – 6 bottles or more per day.
11. Open and empty bottom waste chamber before refilling.
12. Avoid leaving Unit plugged in and charging while using.

WARRANTY: One Year Parts & Labor


H2 USB SPORT MAXX

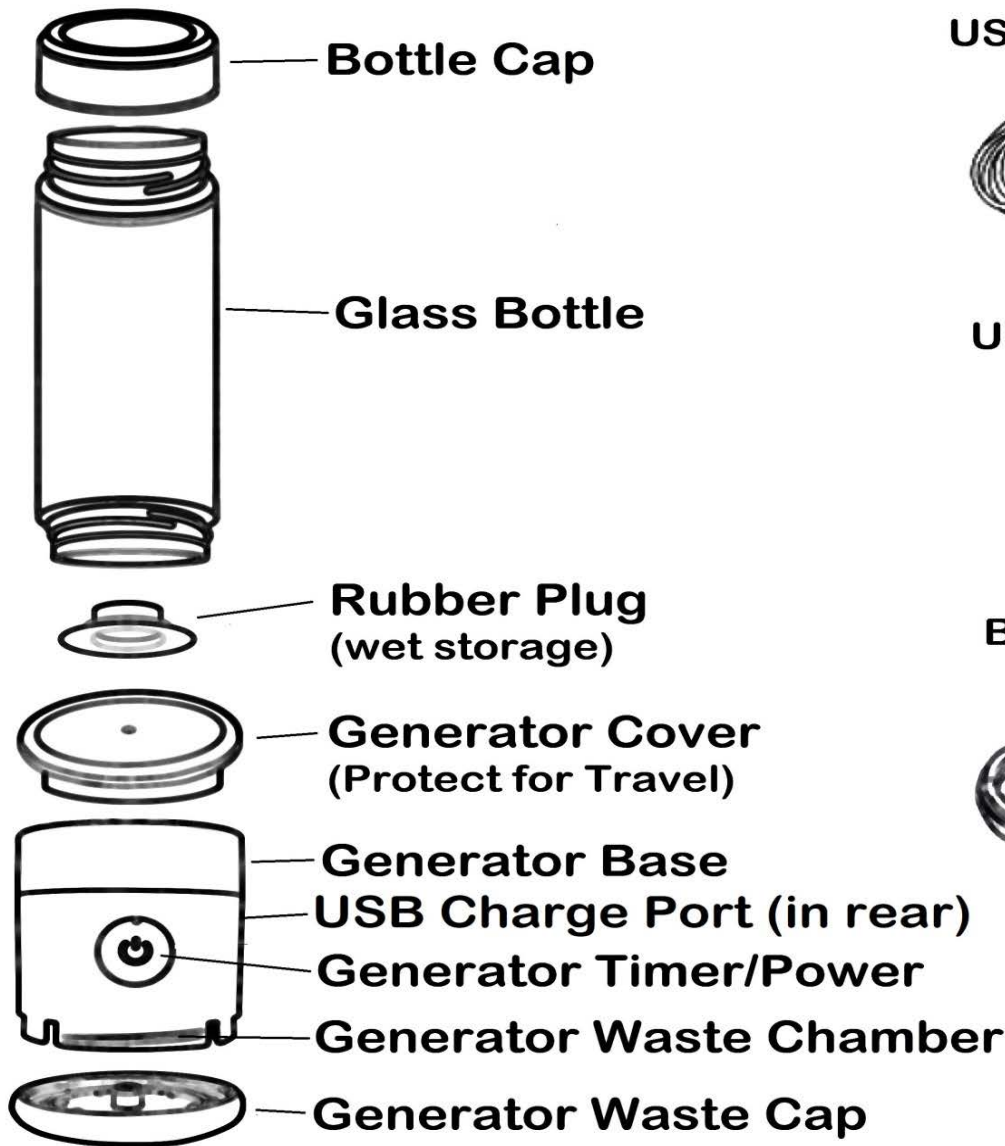

USB Power Cable




USB Power Plug



Bottle Adapters (2 Sizes)




Spare Washer



H2 USB Sport MAXX Specifications

Power	USB 5V / 2A Output: ≤10W
Bottle Capacity	14oz / 400ML (Borosilicate)
Water Types	For All Potable Drinking Water
Hydrogen PPM	0.8 ~ 1.0 (5 min) 1.0 ~ 1.5 (7 min)
ORP Range	-350mv ~ -650mv

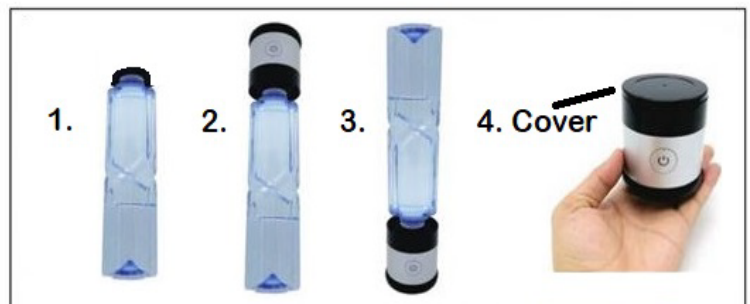

1. Fit adapter ring on bottle. 2. Screw Generator on tight like a cap to avoid leaking. 3. Turn over and generate up into bottle. 4. Use the base cover sideways to unscrew rings at notches.